


*Marsha Atkinson, President*  
*T: (832) 477-1889*  
*F: (936) 636-2658*  
*E: Marsha@4DI-Inc.com*



*Billing & Remittance*  
*1340 CR 3585*  
*Lovelady, TX 75851*

## PIEZO SOUND ALARM

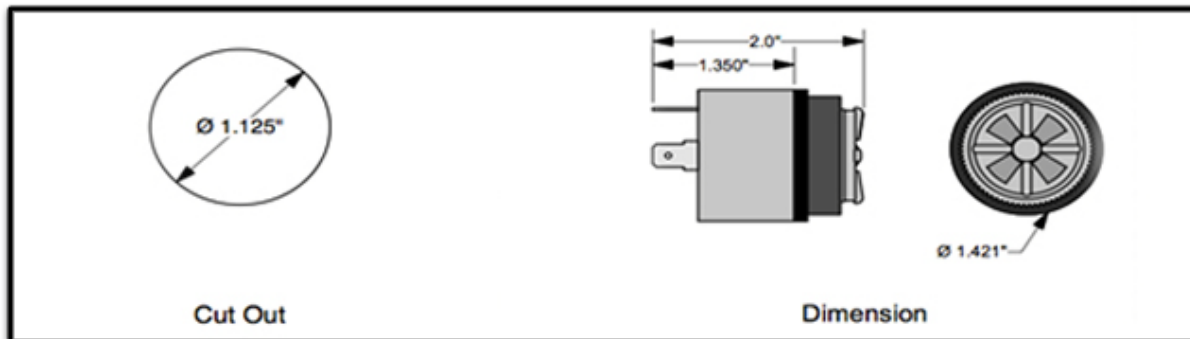

### 24D-W (Black) and 24DR-W (Red)

- ✓ UL Recognized (E175530) for use in UL type 3, 3R, 4X, 12, and 13 environments
- ✓ Solid state. Encapsulated with GE Valox for durability and corrosion resistance.
- ✓ Installs in 1.125" hole. Gasket included.
- ✓ Warble tone cuts through ambient noise.
- ✓ Sound Output: 95dB min. @ 2 feet
- ✓ Resonant Frequency: 2.9 +/- 0.5kHz
- ✓ Current: 30.0 mA
- ✓ Operating Temperature: -20C to 50C
- ✓ Electrical Connections: 1/4" Quick connect terminals
- ✓ Comes with manual volume damper.
- ✓ Voltage: 10-28 VDC
- ✓ **Also available in 120VAC Piezo Warbler**